

DATA SHEET

OCEANO


**Sintered Carbon Block
+ MF Membrane 0,1 µm**

OCEANO CBS + MF with double filtration technology, sintered Carbon Block combined with a microfiltration membrane 0,1µm. It mechanically removes from the water substances in suspension larger than 0,1µm, chlorine and derivatives, organohalogenated compounds, organic substances and metal compounds. The microfiltration membrane also allows an effective removal of bacteria possibly present in the water making it microbiologically pure.



To be used exclusively with drinking water. Do not use with water microbiologically unsafe. Warning: This equipment requires a regular periodic replacement to ensure the requirements of treated potable drinking water. In case you do not use the product for a while, we recommend a cleaning or replacement of the equipment.

| MODEL | S | M | L |
|---------------|---------|---------|---------|
| CODE | OK25S00 | OK25M00 | OK25L00 |
| MAX FLOW | 2,5 | 4,5 | 4,5 |
| CAPACITY | 5.000 | 11.000 | 22.000 |
| BODY MATERIAL | PP | PP | PP |
| DIMENSIONS | A | 255 | 371 |
| | B | 88 | 88 |
| | C | 77,5 | 77,5 |
| | D | 32,5 | 32,5 |

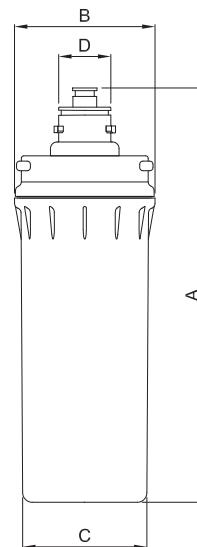

PERFORMANCE

- Capacity and performances of the product depend heavily on the quality of the inlet water. Replace the cartridge when the expected capacity is reached or when the flow becomes slow, in any case no later than 12 months after installation. We recommend to flush always the cartridge when it is installed.
- Filtration rate 0.1 micron
- Max pressure [bar] 8.6
- Vertical/horizontal functioning
- Inlet water temperature max 39°C (100°F) min 2°C (35°F)
- Bayonet Quick Coupling

FILTER HEAD

| MODEL | OCEANO 3/8" c/staffa/viti bracket/screws | OCEANO 3/8" ghiera/staffa/viti collar/bracket/screws | OCEANO DOUBLE 3/8" c/staffa/viti bracket/screws |
|----------|--|--|---|
| CODE | OKT1000 | OKT1500 | OKT3000 |
| Ø (mm.) | 3/8" | 3/8" | 3/8" |
| MATERIAL | NORYL | NORYL | NORYL |

